

## 28 metre Thick High Grade Bauxite Discovered at Taralga, NSW

- 28 metres of continuous high-grade bauxite intersected in hole TG626 beneath 1 metre of clay near Mt Rae, Taralga NSW.
- Hole TG626 ended in high grade direct shipping bauxite – deposit is still open at depth.
- Nearby holes also encountered thick bauxite and ended in high grade bauxite.
- More results are pending prior to concluding a resource estimation upgrade.

Emerging bauxite exploration and development company, Australian Bauxite Limited (ABx, ASX Code ABZ) has received laboratory results from its December 2011 drilling campaign at Taralga near Goulburn, southern NSW (see Figure 1). Results from hole TG626 at Mt Rae (see Figures 2 & 3 for locations) and several nearby holes confirmed the discovery of the company's thickest high-grade bauxite intersection - possibly one of the thickest bauxite intersections in Australia. Most Australian bauxite deposits are less than 4 metres thick and some are less than 2 metres thick whereas hole TG626 intersected 28 metres.

Complete results are listed in the Appendix and are summarised in Table 1 below:

Table 1: Summary of 9 Recent Drill Intercepts at Taralga, Southern NSW

HOLE	From m	To m	Thickness m	Total analyses for samples sieved at 0.26mm					Leach 143 deg C analyses			Wet Screen Yield %	
				Al <sub>2</sub> O <sub>3</sub> %	SiO <sub>2</sub> %	A/S Ratio	Fe <sub>2</sub> O <sub>3</sub> %	TiO <sub>2</sub> %	LOI %	Al <sub>2</sub> O <sub>3</sub> Avl %	Rx SiO <sub>2</sub> %	Avl/Rx Ratio	
TG 626	1	29	28	41.25	1.79	23.0	33.3	3.4	19.4	31.4	0.7	43.7	75.0
TG 628	0	13	13	40.73	1.33	30.5	31.4	3.8	21.9	35.9	0.7	53.7	64.5
TG 653	2	13	11	39.11	1.89	20.6	37.1	4.2	16.7	28.3	0.9	32.8	76.0
TG 654	1.5 & 14-16m		7	38.03	3.53	10.8	38.6	4.1	14.7	23.2	2.1	11.2	77.3
TG 655	0	7	7	41.26	2.45	16.8	29.0	4.6	21.9	34.1	1.3	25.9	69.5
TG 656	1	4	3	53.09	7.34	7.2	4.3	5.6	29.0	48.5	3.4	14.2	33.4
TG 657	0	5	5	49.28	6.18	8.0	12.8	3.9	27.2	45.8	2.7	17.1	51.9
TG 658	0	9	9	36.23	4.98	7.3	34.8	4.7	18.6	29.9	1.3	23.7	65.9
TG 659	0	11	11	39.71	6.37	6.2	29.6	3.6	20.0	32.0	2.7	11.7	57.3

"PDM" are dense grains of emery that are easily recovered by gravity and sold, leaving DSO bauxite as the main product. "A/S" ratio is Al<sub>2</sub>O<sub>3</sub>/SiO<sub>2</sub>. Values above 10 are excellent. Leach conditions for available Al<sub>2</sub>O<sub>3</sub> avl & reactive Rx SiO<sub>2</sub> is 1g leached in 10ml of 90gpl NaOH at 143 degrees C for 30 mins. "Avl/Srx" ratio is (Al<sub>2</sub>O<sub>3</sub> avl)/(Rx SiO<sub>2</sub>). Yield is for wet screening at 0.26mm. Different beneficiation methods will have different yields. Bauxite requiring no upgrade will have 100% yield.

Australian Bauxite CEO Ian Levy said; "ABx and Marubeni Corporation are currently conducting a \$1.5 million pre feasibility study of the Goulburn Bauxite Project, and Taralga is one of the bauxite resource study areas that continues to surprise, especially around Mt Rae, west of Taralga."

The district's deposits contain thick zones of premium grade bauxite, with good potential for more discoveries. The recent discovery hole, TG626 remains open at depth and laterally.

All deposits are gibbsite-rich (trihydrate) bauxite with very low levels of reactive silica clays and free of boehmite (monohydrate). All horizons can produce Direct Shipping or "DSO" bauxite (see Definitions).



Figure 1: Location

AUSTRALIAN BAUXITE LIMITED

ACN 139 494 885

Level 2 Hudson House 131 Macquarie Street Sydney NSW 2000

P: +61 2 9251 7177 F: +61 2 9251 7500 E: corporate@australianbauxite.com.au

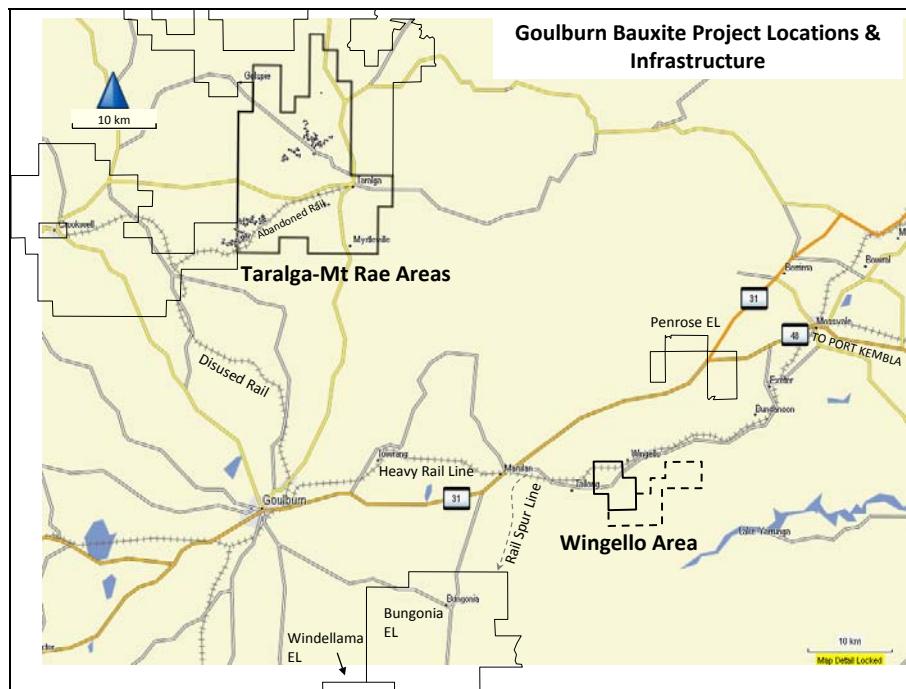


Figure 2: Goulburn District Locations & Infrastructure

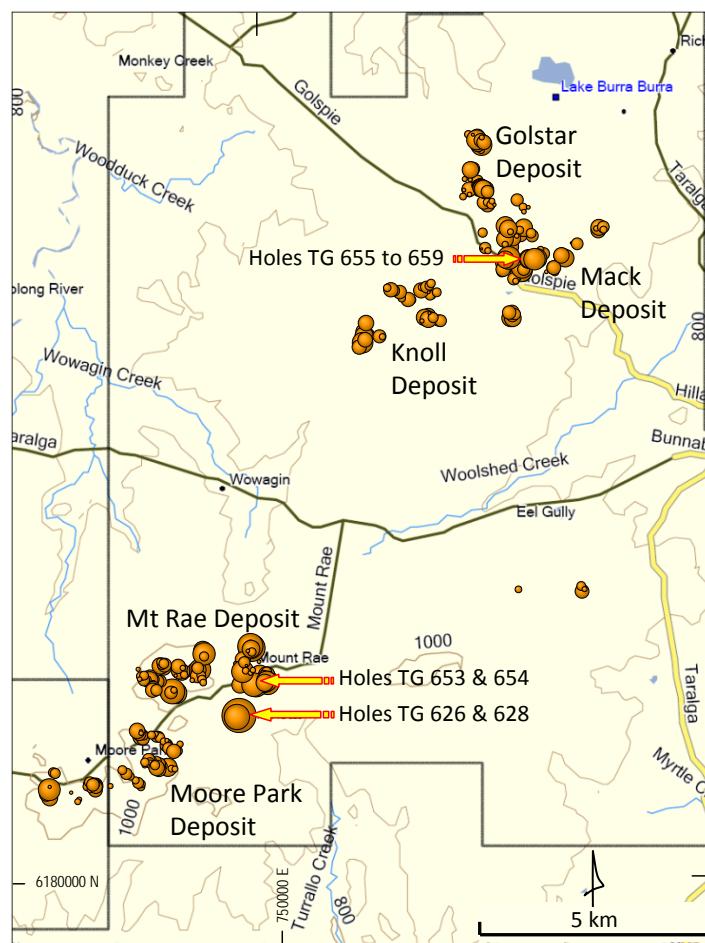


Figure 3: Taralga – Mt Rae Area Bauxite Drillholes  
Circle Size is Proportional to Bauxite thickness x  $\text{Al}_2\text{O}_3$

## Resource Estimation Update

Areas of thick, good quality bauxite continue to be discovered across the Taralga - Mt Rae Areas. It is intended to upgrade the resource estimate for Taralga before the end of the current Pre Feasibility Study ("PFS"), which is scheduled to conclude at the end of March. Como Engineers of Perth have been appointed to coordinate cost estimations and prepare the PFS report.

Current bauxite resources at Taralga total 25 million tonnes (see Resource Statement page 4 below).

### Metallurgical Results Encouraging: Main Production is DSO Bauxite

Metallurgical tests on large samples have been done as part of the Pre Feasibility Study, with METS Engineers of Perth coordinating and summarising the testwork (report in progress).

The Goulburn district bauxite deposits typically have an upper half that contains nodules or "pisoliths" of a black, glassy material which is an emery, comprising mainly fused alumina and trace iron oxides (see Figure 4 below). Well-known bauxite mineralogist, Professor Eggleton of the Australian National University coined the term "PDM" for these black pisoliths which he found in bauxites from Weipa, Northern QLD. PDM stands for "poorly diffracting material" when subjected to X-ray diffraction.

Metallurgical tests on the PDM-bearing bauxite ("PDM-DSO Bx") from the Taralga area have been able to recover the PDM by gravity methods and the remaining bauxite is good-quality DSO bauxite, similar to the DSO bauxite that typically occurs in the lower half of the deposits (see Figure 4). This means that overall, DSO will represent approximately 75% to 85% of total tonnes produced from the Goulburn Bauxite Project. The recovered PDM emery material can be sold at good prices for industrial uses.

Because this PDM-bauxite layer typically has less than 15% Loss on Ignition "LOI" (see Appendix details), it was previously referred to as "Dehydrated" bauxite. It is now called PDM-DSO Bx bauxite.



#### LAYERED BAUXITES OF SOUTHERN NSW

2 to 3 m layer of "PDM-DSO Bx" or emery-bearing pisolithic bauxite.

Comprises 15% to 30% of 5 to 50mm pisoliths of "PDM" which are nodules of dense fused alumina & maghemite-hematite dust in low-density, high quality DSO bauxite.

2 to 4 m layer of DSO bauxite.

Gibbsite plus moderate levels of iron minerals, mainly hematite and limonite (little or no goethite).

Needs no processing – direct shipping bauxite ("DSO") – see Definitions.

1 to 3m layer of white bauxite in places.

Gibbsite plus low iron (3% to 8% Fe<sub>2</sub>O<sub>3</sub>). May be refractory grade bauxite.

TERTIARY QUARTZ SAND OR CLAY BELOW

Figure 4: Typical Bauxite Layers

For further information please contact:

Investor Relations, Henry Kinstlinger, Australian Bauxite Limited

Telephone: +61 2 9251 7177

Fax: +61 2 9251 7500

[www.australianbauxite.com.au](http://www.australianbauxite.com.au)

Email: [corporate@australianbauxite.com.au](mailto:corporate@australianbauxite.com.au)

#### Qualifying statement

The information in this announcement that relate to Exploration Information are based on information compiled by Jacob Rebek and Ian Levy who are members of The Australasian Institute of Mining and Metallurgy and the Australian Institute of Geoscientists. Mr Rebek and Mr Levy are qualified geologists and are directors of Australian Bauxite Limited.

Mr Rebek and Mr Levy have sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which they are undertaking to qualify as a Competent Person as defined in the 2004 Edition of the Australasian Code for Reporting of exploration Results, Mineral Resources and Ore Resources. Mr Rebek and Mr Levy have consented to the inclusion in this announcement of the Exploration Information in the form and context in which it appears.

#### JORC Compliant Resource Statement

The following are Joint Ore Reserve Code (“JORC”)-compliant Public Reports released to the ASX declaring the JORC resources referred to. These can be viewed on the ASX website and the Company will provide these reports, free of charge on request.

<sup>1</sup> 02/09/2010 ASX Inverell JORC Resource Update

<sup>2</sup> 12/05/2011 ASX Taralga Bauxite Resource Doubled to 25 Million Tonnes

<sup>3</sup> 15/08/2011 ASX Maiden Guyra Resource, 6 Million Tonnes

<sup>4</sup> 12/10/2011 ASX Binjour Maiden Resource, 17 Million Tonnes

#### Direct Shipping Bauxite or “Direct Shipping “Ore”

All references in this report to direct shipping bauxite or direct shipping ore (DSO) refers to the company's exploration objective of defining or identifying DSO grade mineralisation.

#### Definitions for Appendix

DSO bauxite Bauxite that can be exported directly with minimal processing

PDM-DSO Bx Bauxite containing nodules of emery, termed PDM as pisoliths which are recoverable by gravity and are generally saleable. The remaining 60% to 70% of material is DSO Bauxite

PDM-DSO-Fe Iron enriched PDM-DSO Bx – may contain recoverable hematite grains, also recoverable by gravity. The remaining 45% to 55% of material is DSO Bauxite.

Averaging method Aggregated average grades in the table are yield-weighted averages of each metre grades and yields.

#### About Australian Bauxite Limited: ASX Code ABZ

Australian Bauxite Limited (ABx) holds the core of the newly discovered Eastern Australian Bauxite Province. Its 37 bauxite tenements in Queensland, NSW and Tasmania covering 8,250 km<sup>2</sup> were rigorously selected on 3 principles:

1. good quality bauxite;
2. proximity to infrastructure connected to export ports; and,
3. free of socio-environmental or native title land constraints.

All tenements are 100% owned and free of obligations for processing and third-party royalties. ABx has already discovered many bauxite deposits and new discoveries are still being made as knowledge and expertise grows.

The company's bauxite is high quality and can be processed into alumina at low temperature – the type that is in short-supply globally. **Global resources declared to date total 84 million tonnes.** At the company's first drilling prospect in Inverell, northern NSW, an interim resource of 35 million tonnes<sup>1</sup> has been reported from drilling 15% to 20% of the area prospective for bauxite and a resource of 25 million tonnes<sup>2</sup> of bauxite has been reported at the Taralga project in southern NSW. 6 million tonnes maiden resource was declared at Guyra<sup>3</sup>. A 16.8 million tonnes<sup>4</sup> maiden resource has been declared at the Binjour Plateau in central QLD, confirming that ABx has discovered a significant bauxite deposit including some bauxite of outstandingly high quality. Australian Bauxite Limited aspires to identify large bauxite resources in the Eastern Australian Bauxite Province, which is emerging as one of the world's best bauxite provinces.

ABx has the potential to create significant bauxite developments in three states - Queensland, New South Wales and Tasmania. Its bauxite deposits are favorably located for direct shipping of bauxite to both local and export customers.

**ABx endorses best practices on agricultural land, strives to leave land and environment better than we find it. We only operate where welcomed.**

## APPENDIX: RECENT BAUXITE INTERCEPTS AT TARALGA-MT RAE

Hole	TG 626	Total analyses for samples sieved at 0.26mm				Leach 143 deg C analyses				Wet Screen Yield %			
		From Mt Rae Deposit m	To m	Thickness m	Al <sub>2</sub> O <sub>3</sub> %	SiO <sub>2</sub> %	A/S Ratio	Fe <sub>2</sub> O <sub>3</sub> %	TiO <sub>2</sub> %	LOI %			
DSO Bauxite	1	2	1	49.50	4.05	12.2	19.2	3.2	23.3	37.0	1.6	23.1	78.7
DSO Bauxite	2	3	1	42.70	2.69	15.9	32.3	3.7	17.8	27.5	1.1	25.0	87.5
PDM-DSO Bx	3	4	1	38.10	2.21	17.2	40.7	3.3	14.7	23.6	0.8	29.5	85.0
PDM-DSO Bx	4	5	1	36.90	2.13	17.3	42.1	3.4	14.5	22.2	0.7	31.7	88.6
PDM-DSO Bx	5	6	1	35.50	2.09	17.0	43.2	3.5	14.7	23.1	0.7	33.0	64.6
PDM-DSO Bx	6	7	1	37.10	1.94	19.1	43.1	3.4	13.7	22.4	0.6	37.3	85.5
PDM-DSO Bx	7	8	1	37.50	2.07	18.1	42.6	3.3	13.7	22.7	0.7	32.4	84.8
PDM-DSO Bx	8	9	1	36.50	2.44	15.0	42.3	3.4	14.5	24.7	0.8	30.9	69.7
PDM-DSO Bx	9	10	1	35.80	2.79	12.8	42.3	3.6	14.8	23.4	0.7	33.4	65.8
PDM-DSO Bx	10	11	1	36.70	1.92	19.1	43.9	3.4	13.3	21.6	0.5	43.2	84.7
PDM-DSO Bx	11	12	1	36.30	2.22	16.4	44.3	3.3	13.0	21.2	0.5	42.4	62.4
PDM-DSO Bx	12	13	1	38.90	1.91	20.4	42.2	3.2	13.0	20.8	0.5	41.6	69.9
PDM-DSO Bx	13	14	1	36.90	1.87	19.7	43.9	3.3	13.2	19.3	0.6	32.2	64.0
PDM-DSO Bx	14	15	1	40.30	1.91	21.1	38.3	3.2	15.4	23.3	0.7	33.3	80.2
PDM-DSO Bx	15	16	1	45.40	1.52	29.9	33.1	2.9	16.1	26.5	0.6	44.2	77.9
DSO Bauxite	16	17	1	41.40	1.30	31.8	33.7	3.6	19.1	31.3	0.6	52.2	92.0
DSO Bauxite	17	18	1	39.30	2.48	15.8	34.9	3.9	18.6	31.1	0.6	51.8	56.2
DSO Bauxite	18	19	1	39.50	2.06	19.2	30.7	4.3	22.6	35.5	0.6	59.2	58.2
DSO Bauxite	19	20	1	42.40	1.06	40.0	27.1	3.7	24.8	39.5	0.5	79.0	60.7
DSO Bauxite	20	21	1	40.30	0.89	45.3	29.8	4.2	23.9	37.0	0.5	74.0	81.2
DSO Bauxite	21	22	1	44.20	0.78	56.7	24.8	3.9	25.6	43.6	0.6	72.7	83.0
DSO Bauxite	22	23	1	44.00	0.89	49.4	24.8	3.7	25.8	39.5	0.6	65.8	57.1
DSO Bauxite	23	24	1	43.40	0.98	44.3	25.6	3.6	25.6	40.3	0.6	67.2	61.5
DSO Bauxite	24	25	1	45.00	0.95	47.4	23.7	3.5	26.2	42.6	0.6	71.0	70.3
DSO Bauxite	25	26	1	45.90	1.18	38.9	22.9	3.3	26.0	43.3	0.7	61.9	76.0
DSO Bauxite	26	27	1	47.50	1.36	34.9	20.5	2.9	27.0	45.1	1.0	45.1	94.4
DSO Bauxite	27	28	1	47.70	1.26	37.9	21.1	3.1	26.1	46.6	0.9	51.8	81.8
DSO Bauxite	28	29	1	46.80	1.28	36.6	21.7	3.2	26.3	44.3	0.9	49.2	77.8
Open at Depth-hole ended in bauxite				???	???	???	???	???	???	???	???	???	???
<b>Total Bauxite</b>	<b>1</b>	<b>29</b>	<b>28</b>	<b>41.25</b>	<b>1.79</b>	<b>23.0</b>	<b>33.3</b>	<b>3.4</b>	<b>19.4</b>	<b>31.4</b>	<b>0.7</b>	<b>43.7</b>	<b>75.0</b>
Comprising:													
<b>PDM-DSO Bx</b>	<b>3</b>	<b>16</b>	<b>13</b>	<b>37.92</b>	<b>2.07</b>	<b>18.3</b>	<b>41.6</b>	<b>3.3</b>	<b>14.2</b>	<b>22.7</b>	<b>0.6</b>	<b>35.0</b>	<b>75.6</b>
<b>DSO Bauxite</b>	<b>1-3 &amp; 16-29m</b>	<b>15</b>		<b>44.18</b>	<b>1.55</b>	<b>28.5</b>	<b>26.0</b>	<b>3.6</b>	<b>23.9</b>	<b>39.0</b>	<b>0.8</b>	<b>50.0</b>	<b>74.4</b>

"PDM" are dense grains of emery that are easily recovered by gravity and sold, leaving DSO bauxite as the main product. "A/S" ratio is Al<sub>2</sub>O<sub>3</sub>/SiO<sub>2</sub>. Values above 10 are excellent. Leach conditions to measure available Al<sub>2</sub>O<sub>3</sub> avl & reactive Rx SiO<sub>2</sub> is 1g leached in 10ml of 90gpl NaOH at 143 degrees C for 30 mins. "Avl/Rx" ratio is (Al<sub>2</sub>O<sub>3</sub> avl)/(Rx SiO<sub>2</sub>). Yield is for screening at 0.26mm. If a different beneficiation method is used, yield will be different. Bauxite requiring no upgrade will have 100% yield.

Hole	TG 628	Mt Rae Deposit	From m	To m	Thickness m	Total analyses for samples sieved at 0.26mm				Leach 143 deg C analyses				Wet Screen Yield %
						Al <sub>2</sub> O <sub>3</sub> %	SiO <sub>2</sub> %	A/S Ratio	Fe <sub>2</sub> O <sub>3</sub> %	TiO <sub>2</sub> %	LOI %	Al <sub>2</sub> O <sub>3</sub> Avl %	Rx SiO <sub>2</sub> %	Avl/Rx Ratio
PDM-DSO Bx	0	1	1	34.20	2.14	16.0	43.3	4.0	15.6	24.2	0.8	30.3	84.3	
PDM-DSO Bx	1	2	1	36.60	2.30	15.9	39.9	3.8	16.6	26.3	0.7	37.6	75.9	
PDM-DSO Bx	2	3	1	37.30	2.15	17.3	40.2	3.8	15.8	27.6	0.8	34.5	82.7	
DSO Bauxite	3	4	1	38.00	1.67	22.8	36.6	3.8	19.1	30.8	0.7	44.0	74.1	
DSO Bauxite	4	5	1	40.70	0.83	49.0	29.6	3.8	24.3	38.4	0.6	64.0	75.2	
DSO Bauxite	5	6	1	44.30	0.83	53.4	25.1	3.6	25.4	43.2	0.6	72.0	64.6	
DSO Bauxite	6	7	1	42.10	0.84	50.1	27.8	4.0	24.5	38.5	0.6	64.2	72.6	
DSO Bauxite	7	8	1	41.00	0.94	43.6	29.1	4.1	23.9	38.8	0.6	64.7	68.9	
DSO Bauxite	8	9	1	42.60	0.87	49.0	27.1	4.0	24.6	42.6	0.6	71.0	56.5	
DSO Bauxite	9	10	1	42.20	0.80	52.8	27.3	4.2	24.6	38.9	0.5	77.8	58.8	
DSO Bauxite	10	11	1	46.30	0.76	60.9	22.1	3.4	26.5	45.8	0.5	91.6	46.9	
DSO Bauxite	11	12	1	48.80	1.12	43.6	19.1	2.9	27.3	45.1	0.8	56.4	37.9	
DSO Bauxite	12	13	1	46.90	1.16	40.4	21.3	3.2	26.5	45.3	0.9	50.3	40.1	
Open at Depth-hole ended in bauxite				???	???	???	???	???	???	???	???	???	???	
<b>Total Bauxite</b>	<b>0</b>	<b>13</b>	<b>13</b>	<b>40.73</b>	<b>1.33</b>	<b>30.5</b>	<b>31.4</b>	<b>3.8</b>	<b>21.9</b>	<b>35.9</b>	<b>0.7</b>	<b>53.7</b>	<b>64.5</b>	
Comprising:														
<b>PDM-DSO Bx</b>	<b>0</b>	<b>3</b>	<b>3</b>	<b>36.01</b>	<b>2.19</b>	<b>16.4</b>	<b>41.2</b>	<b>3.9</b>	<b>16.0</b>	<b>26.0</b>	<b>0.8</b>	<b>33.8</b>	<b>81.0</b>	
<b>DSO Bauxite</b>	<b>3</b>	<b>13</b>	<b>10</b>	<b>42.66</b>	<b>0.98</b>	<b>43.3</b>	<b>27.4</b>	<b>3.8</b>	<b>24.3</b>	<b>40.0</b>	<b>0.6</b>	<b>63.7</b>	<b>59.6</b>	

## Appendix continued

Hole	TG 653	Mt	From	To	Thick-	Total analyses for samples sieved at 0.26mm						Leach 143 deg C analyses			Wet Screen	
						Rae Deposit	m	m	Thickness m	Al <sub>2</sub> O <sub>3</sub> %	SiO <sub>2</sub> %	A/S Ratio	Fe <sub>2</sub> O <sub>3</sub> %	TiO <sub>2</sub> %	LOI %	
DSO Bauxite		2	3	1		33.00	4.47	7.4		39.5	5.0	17.3	26.9	3.1	8.7	50.1
PDM-DSO Bx		3	4	1		41.40	2.67	15.5		39.4	3.6	12.0	20.1	1.6	12.6	78.2
PDM-DSO Bx		4	5	1		44.90	1.80	24.9		37.8	3.5	11.0	20.2	0.7	28.9	90.3
PDM-DSO Bx		5	6	1		40.60	2.38	17.1		39.8	3.7	12.5	23.6	0.6	39.3	83.8
PDM-DSO Bx		6	7	1		39.70	1.38	28.8		39.7	3.8	14.3	25.5	0.5	51.0	82.1
PDM-DSO Bx		7	8	1		37.60	1.46	25.8		40.1	4.0	15.8	27.6	0.5	55.2	77.8
DSO Bauxite		8	9	1		39.60	1.49	26.6		36.0	4.3	17.6	30.6	0.4	76.5	77.1
DSO Bauxite		9	10	1		36.10	1.71	21.1		37.3	4.8	19.1	32.8	0.5	65.6	73.4
DSO Bauxite		10	11	1		36.40	1.96	18.6		35.7	4.9	20.0	33.2	0.9	36.9	77.3
DSO Bauxite		11	12	1		36.80	1.32	27.9		33.8	4.6	22.2	34.5	0.8	43.1	73.2
DSO Bauxite		12	13	1		40.60	1.02	39.8		28.3	4.5	24.3	38.6	0.7	55.1	72.8
<b>Total Bauxite</b>		<b>2</b>	<b>13</b>	<b>11</b>		<b>39.11</b>	<b>1.89</b>	<b>20.6</b>		<b>37.1</b>	<b>4.2</b>	<b>16.7</b>	<b>28.3</b>	<b>0.9</b>	<b>32.8</b>	<b>76.0</b>
Comprising:																
<b>PDM-DSO Bx</b>		<b>3</b>	<b>8</b>	<b>5</b>		<b>40.95</b>	<b>1.94</b>	<b>21.2</b>		<b>39.3</b>	<b>3.7</b>	<b>13.1</b>	<b>23.3</b>	<b>0.8</b>	<b>30.2</b>	<b>82.4</b>
<b>DSO Bauxite</b>		2-3 & 8-13m		<b>6</b>		<b>37.32</b>	<b>1.86</b>	<b>20.1</b>		<b>34.9</b>	<b>4.7</b>	<b>20.2</b>	<b>33.1</b>	<b>0.9</b>	<b>34.9</b>	<b>70.7</b>

Hole	TG 654	Mt	From	To	Thick-	Total analyses for samples sieved at 0.26mm						Leach 143 deg C analyses			Wet Screen	
						Rae Deposit	m	m	Thickness m	Al <sub>2</sub> O <sub>3</sub> %	SiO <sub>2</sub> %	A/S Ratio	Fe <sub>2</sub> O <sub>3</sub> %	TiO <sub>2</sub> %	LOI %	
PDM-DSO Bx		0	1	1		34.00	5.51	6.2		40.9	3.6	15.5	23.7	2.6	9.1	85.1
PDM-DSO Bx		1	2	1		42.40	3.54	12.0		38.7	3.3	11.3	19.6	1.7	11.5	82.9
PDM-DSO Bx		2	3	1		38.30	3.22	11.9		43.3	3.6	10.7	17.5	0.8	21.9	75.5
PDM-DSO Bx		3	4	1		42.80	2.22	19.3		39.1	3.4	11.4	23.1	1.3	17.8	85.5
PDM-DSO Bx		4	5	1		33.60	3.43	9.8		45.3	3.7	12.8	20.1	2.5	8.0	77.4
Clay lens		5	6	1		29.00	9.31	3.1		43.9	4.2	12.7	16.3	8.2	2.0	62.3
PDM-DSO-Fe		6	7	1		24.90	1.66	15.0		62.4	4.0	6.0	10.2	0.6	17.0	83.1
PDM-DSO-Fe		7	8	1		31.50	1.69	18.6		51.4	4.8	9.6	16.7	0.5	33.4	97.6
PDM-DSO-Fe		8	9	1		26.90	1.52	17.7		54.6	5.5	10.5	17.3	0.3	57.7	82.4
PDM-DSO-Fe		9	10	1		21.10	1.06	19.9		52.8	9.3	14.4	13.2	0.3	44.0	82.0
PDM-DSO-Fe		10	11	1		19.70	0.69	28.6		54.2	8.6	15.1	10.9	0.4	27.3	79.6
PDM-DSO-Fe		11	12	1		18.10	1.03	17.6		54.3	10.4	14.5	8.3	0.5	16.6	83.6
PDM-DSO-Fe		12	13	1		17.90	0.72	24.9		55.0	9.8	15.0	9.5	0.4	23.8	85.3
PDM-DSO-Fe		13	14	1		21.50	0.74	29.1		52.3	8.1	15.9	13.8	0.4	34.5	84.2
DSO Bauxite		14	15	1		33.90	0.96	35.3		36.3	6.4	21.0	27.7	0.6	46.2	84.1
DSO Bauxite		15	16	1		42.80	7.25	5.9		20.6	5.1	23.3	34.3	6.8	5.0	50.8
<b>Total Bauxite</b>		1-5 & 14-16m		<b>7</b>		<b>38.03</b>	<b>3.53</b>	<b>10.8</b>		<b>38.6</b>	<b>4.1</b>	<b>14.7</b>	<b>23.2</b>	<b>2.1</b>	<b>11.2</b>	<b>77.3</b>
Comprising:																
<b>PDM-DSO Bx</b>		<b>0</b>	<b>5</b>	<b>5</b>		<b>38.29</b>	<b>3.59</b>	<b>10.7</b>		<b>41.4</b>	<b>3.5</b>	<b>12.3</b>	<b>20.9</b>	<b>1.8</b>	<b>11.7</b>	<b>81.3</b>
<b>PDM-DSO-Fe</b>		<b>6</b>	<b>14</b>	<b>8</b>		<b>22.88</b>	<b>1.15</b>	<b>19.9</b>		<b>54.6</b>	<b>7.5</b>	<b>12.6</b>	<b>12.6</b>	<b>0.4</b>	<b>29.4</b>	<b>84.7</b>
<b>DSO Bauxite</b>		<b>14</b>	<b>16</b>	<b>2</b>		<b>37.25</b>	<b>3.33</b>	<b>11.2</b>		<b>30.4</b>	<b>5.9</b>	<b>21.8</b>	<b>30.2</b>	<b>2.9</b>	<b>10.3</b>	<b>67.5</b>

Hole	TG 655 Mack	Deposit	From	To	Thick-	Total analyses for samples sieved at 0.26mm						Leach 143 deg C analyses			Wet Screen	
						m	m	ness m	Al <sub>2</sub> O <sub>3</sub> %	SiO <sub>2</sub> %	A/S Ratio	Fe <sub>2</sub> O <sub>3</sub> %	TiO <sub>2</sub> %	LOI %	Al <sub>2</sub> O <sub>3</sub> Avl %	Rx SiO <sub>2</sub> %
PDM-DSO Bx		0	1	1		43.60	2.08	21.0		36.0	3.6	14.0	27.5	0.8	34.4	89.6
DSO Bauxite		1	2	1		38.30	1.56	24.6		34.3	4.1	21.2	33.6	0.5	67.2	62.1
DSO Bauxite		2	3	1		42.90	1.50	28.6		26.4	4.6	23.9	40.3	0.4	100.8	69.5
DSO Bauxite		3	4	1		42.50	1.96	21.7		24.4	5.5	24.8	38.5	0.7	55.0	80.7
DSO Bauxite		4	5	1		43.30	1.92	22.6		23.1	5.5	25.4	37.9	0.9	42.1	77.1
DSO Bauxite		5	6	1		39.90	3.83	10.4		26.4	5.0	23.9	33.7	2.7	12.5	65.4
DSO Bauxite		6	7	1		33.90	5.92	5.7		33.9	3.9	21.5	23.9	4.9	4.9	42.2
<b>Total Bauxite</b>		<b>0</b>	<b>7</b>	<b>7</b>		<b>41.26</b>	<b>2.45</b>	<b>16.8</b>		<b>29.0</b>	<b>4.6</b>	<b>21.9</b>	<b>34.1</b>	<b>1.3</b>	<b>25.9</b>	<b>69.5</b>

## Appendix continued

Hole TG 656 Mack Deposit	From To Thick-			Total analyses for samples sieved at 0.26mm					Leach 143 deg C analyses			Wet Screen Yield %	
	From m	To m	Thickness m	Al <sub>2</sub> O <sub>3</sub> %	SiO <sub>2</sub> %	A/S Ratio	Fe <sub>2</sub> O <sub>3</sub> %	TiO <sub>2</sub> %	LOI %	Al <sub>2</sub> O <sub>3</sub> Avl %	Rx SiO <sub>2</sub> %	Avl/Rx Ratio	
DSO Bauxite	1	2	1	53.30	6.63	8.0	5.5	4.8	29.1	49.2	2.3	21.4	47.5
DSO Bauxite	2	3	1	52.30	7.20	7.3	3.4	7.6	28.8	48.1	4.2	11.5	31.8
DSO Bauxite	3	4	1	53.80	9.17	5.9	2.8	4.5	29.1	47.5	4.7	10.1	21.0
<b>Total Bauxite</b>	<b>1</b>	<b>4</b>	<b>3</b>	<b>53.09</b>	<b>7.34</b>	<b>7.2</b>	<b>4.3</b>	<b>5.6</b>	<b>29.0</b>	<b>48.5</b>	<b>3.4</b>	<b>14.2</b>	<b>33.4</b>

Hole TG 657 Mack Deposit	From To Thick-			Total analyses for samples sieved at 0.26mm					Leach 143 deg C analyses			Wet Screen Yield %	
	From m	To m	Thickness m	Al <sub>2</sub> O <sub>3</sub> %	SiO <sub>2</sub> %	A/S Ratio	Fe <sub>2</sub> O <sub>3</sub> %	TiO <sub>2</sub> %	LOI %	Al <sub>2</sub> O <sub>3</sub> Avl %	Rx SiO <sub>2</sub> %	Avl/Rx Ratio	
DSO Bauxite	0	1	1	45.60	3.96	11.5	20.9	3.7	25.3	41.9	2.8	15.0	62.3
DSO Bauxite	1	2	1	44.90	5.20	8.6	19.1	5.0	25.2	41.2	3.2	12.9	70.0
DSO Bauxite	2	3	1	55.70	6.06	9.2	3.7	3.2	30.8	54.3	2.1	25.9	71.2
DSO Bauxite	3	4	1	50.70	7.08	7.2	9.8	4.0	27.8	43.6	2.9	15.0	40.6
DSO Bauxite	4	5	1	50.70	17.70	2.9	2.3	2.5	26.5	48.7	2.0	24.4	15.6
<b>Total Bauxite</b>	<b>0</b>	<b>5</b>	<b>5</b>	<b>49.28</b>	<b>6.18</b>	<b>8.0</b>	<b>12.8</b>	<b>3.9</b>	<b>27.2</b>	<b>45.8</b>	<b>2.7</b>	<b>17.1</b>	<b>51.9</b>

Hole TG 658 Mack Deposit	From To Thick-			Total analyses for samples sieved at 0.26mm					Leach 143 deg C analyses			Wet Screen Yield %	
	From m	To m	Thickness m	Al <sub>2</sub> O <sub>3</sub> %	SiO <sub>2</sub> %	A/S Ratio	Fe <sub>2</sub> O <sub>3</sub> %	TiO <sub>2</sub> %	LOI %	Al <sub>2</sub> O <sub>3</sub> Avl %	Rx SiO <sub>2</sub> %	Avl/Rx Ratio	
PDM-DSO Bx	0	1	1	27.60	3.49	7.9	56.1	3.2	8.9	13.7	1.2	11.4	67.0
PDM-DSO Bx	1	2	1	33.30	3.05	10.9	47.2	3.5	12.3	20.6	0.6	34.3	75.9
PDM-DSO Bx	2	3	1	32.90	3.28	10.0	44.2	3.9	14.9	25.2	0.6	42.0	83.7
DSO Bauxite	3	4	1	32.40	2.97	10.9	41.1	4.5	18.3	28.6	0.6	47.7	74.8
DSO Bauxite	4	5	1	35.50	3.14	11.3	34.3	5.2	21.1	32.8	1.1	29.8	71.7
DSO Bauxite	5	6	1	38.60	4.25	9.1	28.1	5.6	22.7	34.2	1.9	18.0	72.8
DSO Bauxite	6	7	1	42.10	5.06	8.3	22.7	5.2	24.3	39.2	2.5	15.7	39.2
DSO Bauxite	7	8	1	45.20	6.28	7.2	15.7	6.4	25.8	42.2	2.0	21.1	58.9
DSO Bauxite	8	9	1	46.20	18.20	2.5	4.1	5.9	25.0	43.8	1.9	23.1	48.8
<b>Total Bauxite</b>	<b>0</b>	<b>9</b>	<b>9</b>	<b>36.23</b>	<b>4.98</b>	<b>7.3</b>	<b>34.8</b>	<b>4.7</b>	<b>18.6</b>	<b>29.9</b>	<b>1.3</b>	<b>23.7</b>	<b>65.9</b>
Comprising:													
<b>PDM-DSO Bx</b>	<b>0</b>	<b>3</b>	<b>3</b>	<b>31.47</b>	<b>3.27</b>	<b>9.6</b>	<b>48.7</b>	<b>3.6</b>	<b>12.2</b>	<b>20.3</b>	<b>0.8</b>	<b>26.1</b>	<b>75.5</b>
<b>DSO Bauxite</b>	<b>3</b>	<b>9</b>	<b>6</b>	<b>39.18</b>	<b>6.04</b>	<b>6.5</b>	<b>26.2</b>	<b>5.4</b>	<b>22.5</b>	<b>35.9</b>	<b>1.6</b>	<b>23.0</b>	<b>61.0</b>

Hole TG 659 Mack Deposit	From To Thick-			Total analyses for samples sieved at 0.26mm					Leach 143 deg C analyses			Wet Screen Yield %	
	From m	To m	Thickness m	Al <sub>2</sub> O <sub>3</sub> %	SiO <sub>2</sub> %	A/S Ratio	Fe <sub>2</sub> O <sub>3</sub> %	TiO <sub>2</sub> %	LOI %	Al <sub>2</sub> O <sub>3</sub> Avl %	Rx SiO <sub>2</sub> %	Avl/Rx Ratio	
PDM-DSO Bx	0	1	1	26.00	4.09	6.4	55.1	3.1	11.0	16.4	1.5	10.9	82.9
PDM-DSO Bx	1	2	1	35.20	2.35	15.0	46.9	3.3	11.5	19.7	0.6	32.8	83.7
PDM-DSO Bx	2	3	1	35.50	2.30	15.4	45.3	3.4	12.8	20.9	0.6	34.8	79.7
PDM-DSO Bx	3	4	1	37.20	2.46	15.1	40.3	3.7	15.6	25.5	0.6	42.5	71.8
DSO Bauxite	4	5	1	34.10	3.50	9.7	36.9	4.6	20.2	28.5	1.1	25.9	74.8
DSO Bauxite	5	6	1	31.60	4.80	6.6	40.0	4.1	18.8	26.6	2.6	10.2	60.8
DSO Bauxite	6	7	1	45.30	6.98	6.5	17.2	5.1	24.9	40.1	4.5	8.9	21.1
DSO Bauxite	7	8	1	42.00	7.22	5.8	22.3	4.3	23.5	34.7	5.5	6.3	35.5
DSO Bauxite	8	9	1	45.90	7.78	5.9	16.5	3.6	25.6	40.4	5.1	7.9	35.2
DSO Bauxite	9	10	1	53.90	9.09	5.9	4.3	2.7	29.5	50.4	5.3	9.5	37.6
DSO Bauxite	10	11	1	50.10	19.45	2.6	1.3	1.9	27.0	48.5	2.6	18.7	46.9
<b>Total Bauxite</b>	<b>0</b>	<b>11</b>	<b>11</b>	<b>39.71</b>	<b>6.37</b>	<b>6.2</b>	<b>29.6</b>	<b>3.6</b>	<b>20.0</b>	<b>32.0</b>	<b>2.7</b>	<b>11.7</b>	<b>57.3</b>
Comprising:													
<b>PDM-DSO Bx</b>	<b>1</b>	<b>5</b>	<b>4</b>	<b>35.47</b>	<b>2.64</b>	<b>13.4</b>	<b>42.5</b>	<b>3.7</b>	<b>14.9</b>	<b>23.5</b>	<b>0.7</b>	<b>32.6</b>	<b>77.5</b>
<b>DSO Bauxite</b>	<b>5</b>	<b>11</b>	<b>6</b>	<b>43.70</b>	<b>9.38</b>	<b>4.7</b>	<b>18.5</b>	<b>3.5</b>	<b>24.4</b>	<b>39.2</b>	<b>4.0</b>	<b>9.8</b>	<b>39.5</b>

"PDM" are dense grains of emery that are easily recovered by gravity and sold, leaving DSO bauxite as the main product. "A/S" ratio is Al<sub>2</sub>O<sub>3</sub>/SiO<sub>2</sub>. Values above 10 are excellent. Leach conditions to measure available Al<sub>2</sub>O<sub>3</sub> avl & reactive Rx SiO<sub>2</sub> is 1g leached in 10ml of 90gpl NaOH at 143 degrees C for 30 mins. "Avl/Srx" ratio is (Al<sub>2</sub>O<sub>3</sub> avl)/(Rx SiO<sub>2</sub>). Yield is for wet screening at 0.26mm. If a different beneficiation method is used, yield will be different. Bauxite requiring no upgrade will have 100% yield.

**Averaging method:** Aggregated average grades in the table, namely Total bauxite, PDM-DSO Bx and DSO Bauxite for each hole are yield-weighted averages of each metre's grades and yields

ABx



ABx tenements at 31 December 2011