

# TOP-MOUNT SAND FILTER SYSTEM



- 

All-weather performance
- 

Easy Operation and Maintenance
- 

Energy Saving

## FEATURED HIGHLIGHTS

- Systems are designed for quick assembly and precise alignment of components
- Pumps and filter are performance-matched to provide maximum flow and energy efficiency
- Optional bases are molded of rugged plastic for long-lasting, all-weather performance 4-position valves provides maximum flow at low pressure drop







## ORDER GUIDE

Sand Filter System with CE Pump

MODEL NUMBER	FILTER Φ	DESIGNED FLOW RATE M³/H	PUMP /HP	VOLTAGE /HERTZ	VALVE	NET WEIGHT KGS.
72018	73035/14"	7	72512/0.25 hp without pre-filter	230/50	4-way	8.6
72019	73035/14"	7	72513/0.25 hp with pre-filter	230/50	4-way	9.5
72020	73035/14"	10	72514/0.35 hp without pre-filter	230/50	4-way	9.5
72021	73035/14"	10	72515/0.35 hp with pre-filter	230/50	4-way	10.2

## DIMENSIONS

Units: MM (IN)

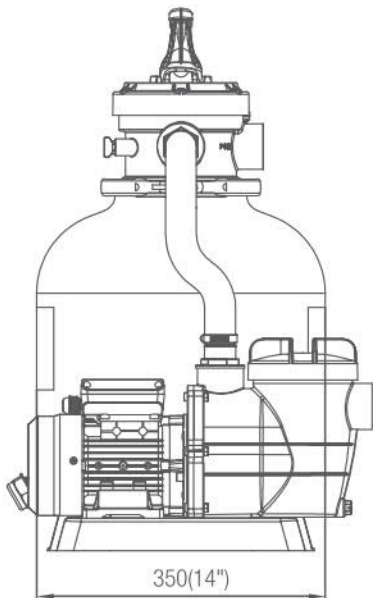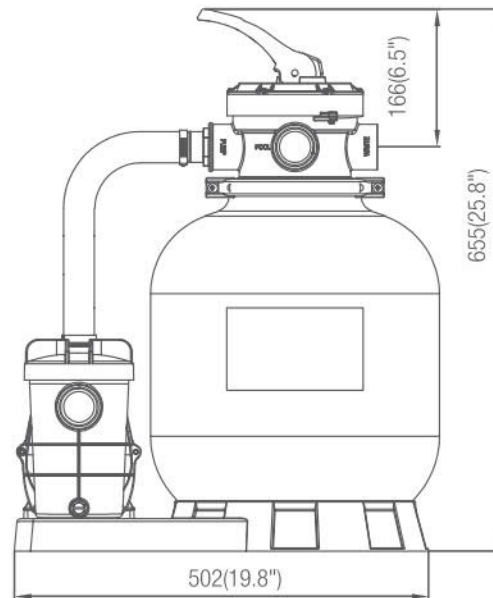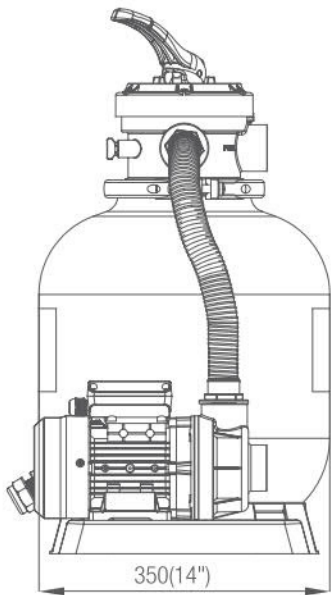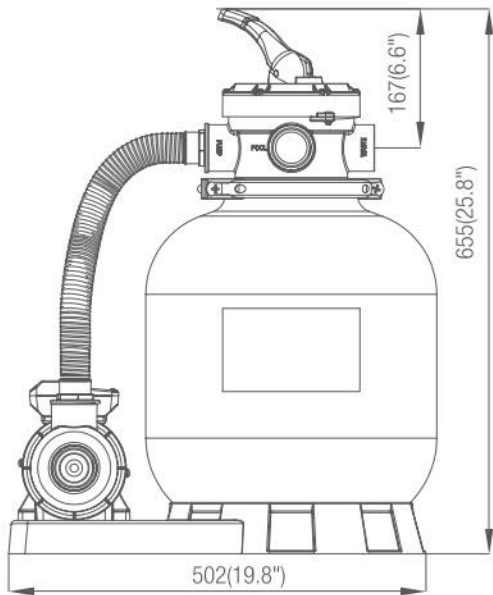

## ORDER GUIDE

Sand Filter System with ETL Pump

MODEL NUMBER	FILTER Φ	DESIGNED FLOW RATE GPM	PUMP /HP	VOLTAGE /HERTZ	VALVE	NET WEIGHT LBS.
72218	73035/14"	35	72712/0.25 hp without pre-filter	115/60	4-way	18.5
72219	73035/14"	35	72713/0.25 hp with pre-filter	115/60	4-way	20.9
72220	73035/14"	44	72714/0.35 hp without pre-filter	115/60	4-way	20.5
72221	73035/14"	44	72715/0.35 hp with pre-filter	115/60	4-way	22.9