

PRO SERIES TOP-MOUNT SAND FILTER SYSTEM



All-weather
performance



Easy Operation
and Maintenance



Energy Saving

FEATURED HIGHLIGHTS

- Systems are designed for quick assembly and precise alignment of components
- Pumps and filters are performance-matched to provide maximum flow and energy efficiency
- Optional microprocessor pump timer available
- Optional with or without pre-filter
- Filter bases are molded of rugged plastic for long-lasting, all weather performance 7-position valve provides maximum flow at low pressure drop


ORDER GUIDE

Sand Filter System with CE Pump

MODEL NUMBER	FILTER Φ	DESIGNED FLOW RATE M³/H	PUMP /HP	VOLTAGE /HERTZ	VALVE	NET WEIGHT KGS
72027	73040/16"	14	72527/0.5 hp	230/50	6-way	18.5
72028	73050/19"	15	72528/0.75 hp	230/50	6-way	22.5
72029	73060/24"	16	72529/1.0 hp	230/50	6-way	27
72041	73040/16"	9	72515/0.35 hp	230/50	6-way	14.2
72042	73050/19"	15	72542/0.75 hp	230/50	6-way	22.5
72043	73060/24"	18	72543/1.0 hp	230/50	6-way	30

DIMENSIONS

Units: MM (IN)

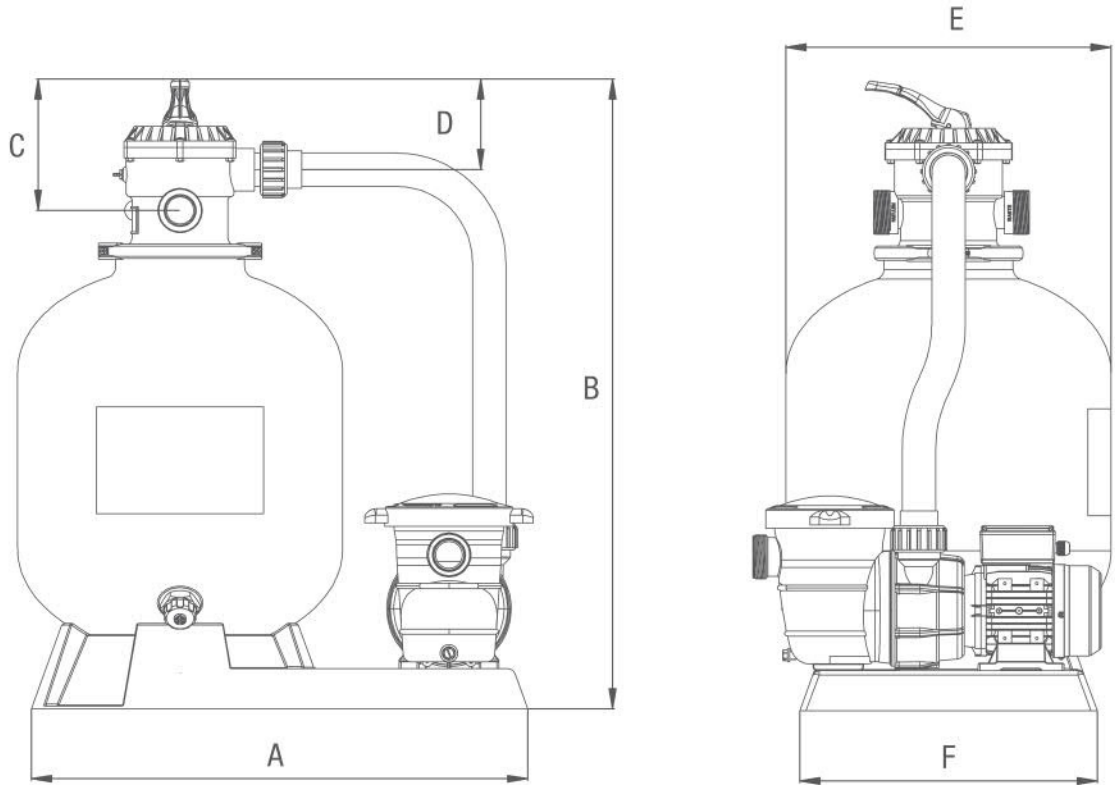

MODEL NUMBER	A	B	C	D	E	F
72027 / 72041	742 (29.2")	848 (33.4")	185 (7.28")	125 (4.92")	400 (16")	445 (17.5")
72028 / 72042	742 (29.2")	930 (37.4")	185 (7.28")	125 (4.92")	500 (19")	445 (17.5")
72029 / 72043	742 (29.2")	1130 (45.5")	185 (7.28")	125 (4.92")	600 (24")	445 (17.5")
72228 / 72241	742 (29.2")	848 (33.4")	185 (7.28")	125 (4.92")	400 (16")	445 (17.5")
72229 / 72242	742 (29.2")	930 (37.4")	185 (7.28")	125 (4.92")	500 (19")	445 (17.5")
72230 / 72243	742 (29.2")	1130 (45.5")	185 (7.28")	125 (4.92")	600 (24")	445 (17.5")

ORDER GUIDE

Sand Filter System with ETL Pump

MODEL NUMBER	FILTER Φ	DESIGNED FLOW RATE GPM	PUMP /HP	VOLTAGE /HERTZ	VALVE	NET WEIGHT LBS.
72228	73040/16"	60	72728/0.75 hp	115/60	6-way	42
72229	73050/19"	70	72729/1.0 hp	115/60	6-way	50
72230	73060/24"	83	72730/1.5 hp	115/60	6-way	64
72241	73040/16"	30	72715/0.35 hp	115/60	6-way	34
72242	73050/19"	70	72742/0.75 hp	115/60	6-way	49
72243	73060/24"	79	72743/1.0 hp	115&230/60	6-way	63