

PRO SERIES SAND FILTERS

SPLASH Pro Series high-rate sand filter are the latest in pool filter technology. Molded of durable, corrosion-proof polymeric material, Pro Series filters feature an advanced, self-cleaning lateral under drain system for smooth, efficient flow and totally balanced backwashing.

SPLASH Pro Series high-rate sand filters are the very latest in pool filter technology. Molded of durable, corrosion-proof polymeric material, they feature attractive, unitized tank construction for years of trouble-free operation with only minimal care.



All-weather performance




Easy Operation and Maintenance




DIMENSIONS

Units: MM (IN)

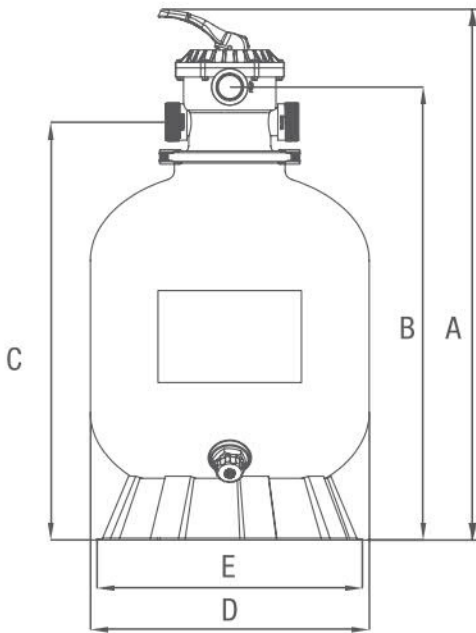

MODEL NUMBER	73040	73050	73054	73057	73060
A	810 (31.9")	930 (36.6")	975(38.4")	977(38.5")	1110 (43.7")
B	685 (27.0")	805 (31.7")	985(38.7")	987(38.9")	985 (38.8")
C	625 (24.6")	745 (29.3")	790(31.0")	792(31.2")	925 (36.4")
D	406 (16.0")	485 (19.0")	550(22.0")	570(22.5")	610 (24.0")
E	400 (15.8")	480(18.9")	480(18.9")	480(18.9")	480 (18.9")

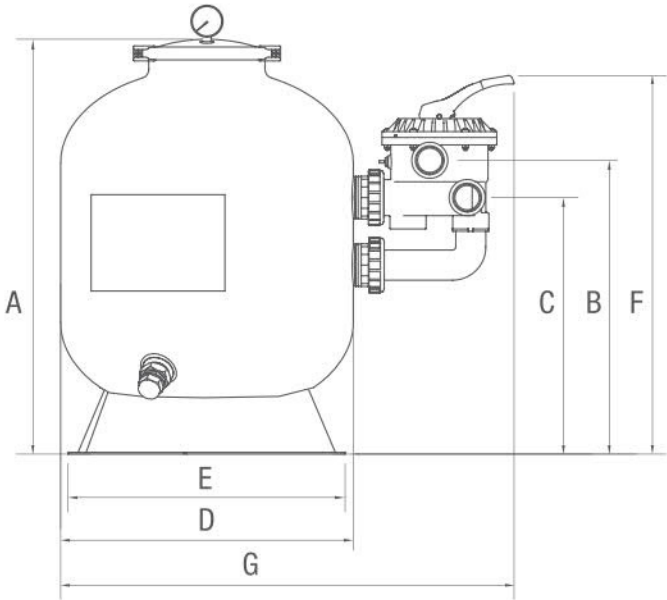

MODEL NUMBER	73041	73051	73061
A	590 (23.2")	700 (27.5")	890 (35.0")
B	450 (17.7")	515 (20.3")	610 (24.0")
C	390 (15.3")	455 (18.0")	550 (21.6")
D	406 (16")	485 (19")	610 (24")
E	400 (15.8")	480 (18.9")	480(18.9")
F	580 (22.8")	650 (25.6")	750 (29.5")
G	676 (26.6")	755 (29.7")	880 (34.6")

FEATURED HIGHLIGHTS

- Durable, corrosion-proof filter tank, all weather proof
- 7-position top valve provides maximum flow at lower pressure
- combined water and sand drain makes servicing and winterizing fast and easy
- Top diffuser ensures even distribution of water over the top of the sand media bed; which provides smooth, free-flowing performance
- Precision-engineered self-cleaning laterals for balanced flow and backwashing, plus easy serviceability



ORDER GUIDE

MODEL NUMBER	FILTER Φ	DESIGNED FLOW RATE GPM(M³/H)	FILTER AREA FT²(M²)	SAND REQUIRED LB.(KG)	MAX. WORKING PRESSURE PSI(BAR)	VALVE
73040	16"	35 (7.9)	1.4 (0.12)	100 (45)	50 (3.5)	6-way 1 1/2" TOP
73050	19"	42 (9.5)	2.1 (0.20)	175 (80)	50 (3.5)	6-way 1 1/2" TOP
73060	24"	62 (14.1)	3.1 (0.29)	300 (136)	50 (3.5)	6-way 1 1/2" TOP
73054	22"	52 (11.8)	2.6 (0.25)	250 (114)	50 (3.5)	6-way 1 1/2" TOP
73057	22.5"	54 (12.3)	2.7 (0.26)	280 (127)	50 (3.5)	6-way 1 1/2" TOP
73041	16"	35 (7.9)	1.35 (0.13)	100 (45)	50 (3.5)	6-way 1 1/2" SIDE
73051	19"	42 (9.5)	2.1 (0.20)	175 (79)	50 (3.5)	6-way 1 1/2" SIDE
73061	24"	72 (16.4)	3.14 (0.29)	300 (136)	50 (3.5)	6-way 1 1/2" SIDE